


# STB-S61 / STB-M56

Flush Speaker and Microphone

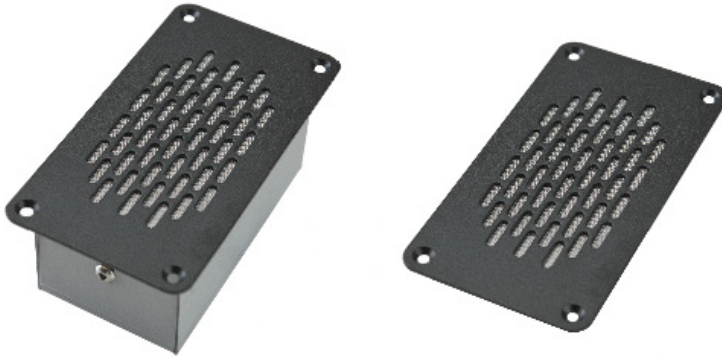

CONTACTA WINDOW INTERCOM SYSTEMS

Our customer side speaker and omni-directional microphone set is mounted into a surface for a sleek look.

## Physical Data

Dimensions	Height – 1.97" Width – 2.56" Depth – 4.72"
Weight	0.99 lbs
Construction	Mild Steel Zintec Case
Finish	Grey Powder Coated Leatherette Black Textured Powder Coated

## Technical Data

### Speaker

RMS	5W
Impedance	4Ω
Output	SPL 1W @ 1M 85dB
Frequency Response	150 Hz to 10,300 Hz

### Microphone

Directional Response	Omni-Directional
Sensitivity	-42.5 +/- 2.0dB @ 1KHz (0dB=1V/pa)
Impedance	2K Ohms +/- @ 1KHz
Frequency Response	100Hz-5000Hz



## Features

- › Semi-rigid goose neck microphone
- › Mute switch to isolate customer microphone input
- › Freestanding unit allows the staff to select the appropriate positioning on the counter

## Applications:

For use where one to one communication takes place

- › Banks
- › Post offices
- › Information Centers
- › Airports
- › Ticket Counters

contacta 

Phone: (616) 392-3400  
Email: sales@contactainc.com  
www.contactainc.com